

## ALUMINUM CHIMNEY LINERS PRODUCT DATA

### DESCRIPTION


Aluminum Chimney Liner

### APPLICATIONS

- Category 1 Gas Burning Appliances
- Relining of Masonry Chimney or Factory Built Chimneys for NG or LP
- Typical Usage Furnaces, HWT & Gas Inserts

### FEATURES AND BENEFITS

- Diameter: 3" – 8"
  - Including 5.5"
- Length: Up to 45'
- Factory Installed Pull Through Connector
- Ribbed Mortar Guard
- Water Dam Built into Flashing
- Superior Cap Design Includes Storm Collar & Connector
- Optional Heavy Duty Connector – ALCLKxFA
- Warranty: 10 Year
- Made in Canada

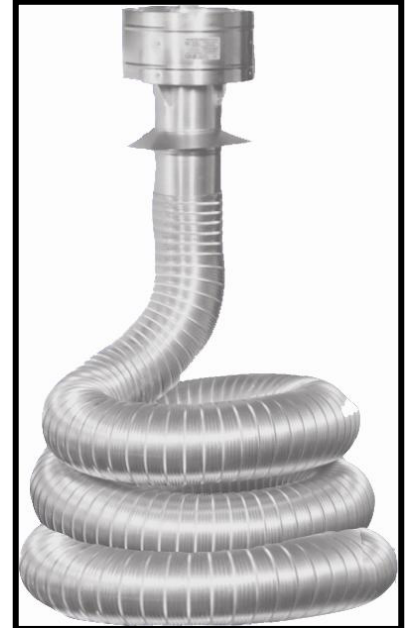

### PRODUCT DATA

- UL/ULC Listed
- Maximum Temperature Rating: 243<sup>0</sup>c or 470<sup>0</sup>F
- Material: 2 Ply Aluminum (.005")
- Exceeds UL/ULC Hanging & Bending Test

### KIT CONTENTS

- Cap w/Storm Collar & Connector
- Length of Flex
- 16" x 16" Galvanized Flashing
- Mortar Guard
- Pull Through Connector
- Package of Screws
- Instruction Manual & Warranty Card