

B-VENT MODEL BVS UNIVERSAL ADAPTOR (BMUA, BFUA)


Installation Instructions

Engineered to be used in retrofit **B-Vent to B-Vent** chimney applications only. For use with all approved type "B" gas vents listed with ULC/UL. Male/Female adaptors are manufactured for use above or below the roof line.

1/2" Airspace Application

For use with listed Don Park and Energy Vent type B-vent

1. Slide adaptor over existing vent as far as it will go.
2. Locate draw band maximum of 1/2" from raw end of adaptor.
3. Install 2 #8 x 3/8" sheet metal screws (provided) through draw band and both outer casings to ensure that there is no slippage. (NOTE: be sure not to tighten and puncture the inner liner.)
4. Then silicone all exposed seams/joints using silicone with a temperature rating of 300 deg. F (150 deg. C) or more.
5. Continue retrofit with **Don Park B-vent only**.

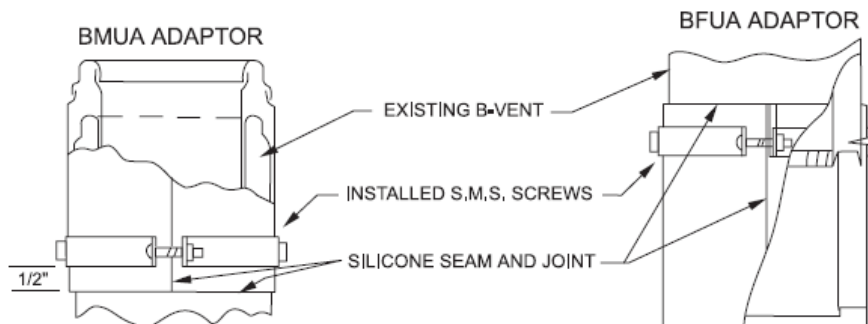

B-VENT MODEL BVS UNIVERSAL ADAPTOR (BMUA, BFUA)

1/4" Airspace Application

For Use with Listed Selkirk, Simpson Dura Vent, Ecco, Metal Pack, Hart & Cooley, Airjet and American Metal type B-Vent.

1. Because **Don Park B-Vent** uses 1/2" airspace, a manual field crimp must be applied to the outer wall of the universal adaptor using a hand crimper.
2. Follow steps 1. through 5. in previous application to complete the installation.

