

VENT THIMBLE

DESCRIPTION


The vent thimble is manufactured using 30 gauge galvanized steel.

APPLICATIONS

Typically used in new home construction to provide an opening in brick, stone or siding for a fresh air intake or exhaust hood. It enables the hood to be installed after the wall surface has been completed.

FEATURES & BENEFITS

- Reduces the possibility of the hoods from being damaged
 - With the sleeve installed reduces the time required to make a hole in the brick or stone
 - After the hood has been installed on the outside of the home the thimble can be filled with insulation to maintain the desired R value
- Thimble is required for Energy Star rated homes

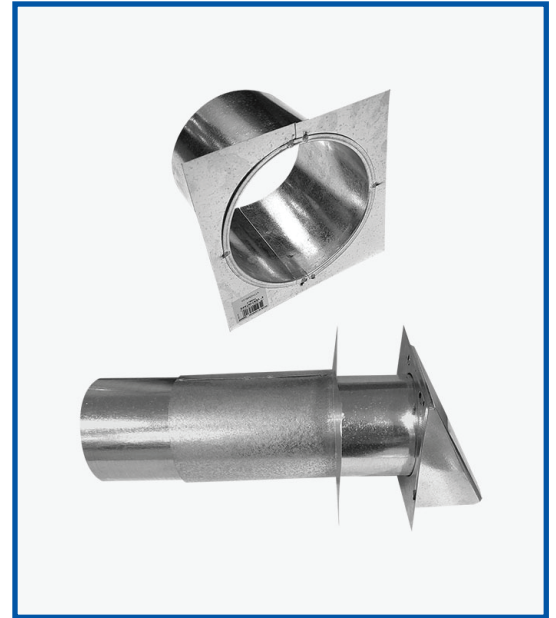

Part Number	Description	UOM	Ctn.Qty
VTTHIMBLE4	4" VENT/INTAKE THIMBLE	EA	36
VTTHIMBLE5	5" VENT/INTAKE THIMBLE	EA	42
VTTHIMBLE6	6" VENT/INTAKE THIMBLE	EA	36

HEAD OFFICE

2259 Markham Road, Scarborough
Ontario, Canada M1B 2W3
TEL: 416.449.7275 FAX: 416.449.2614